


HEAVY DUTY AND LONGER LIFE.

SINGLE & DOUBLE REDUCTION RT52-185 & RT52-380 TANDEM DRIVE AXLE

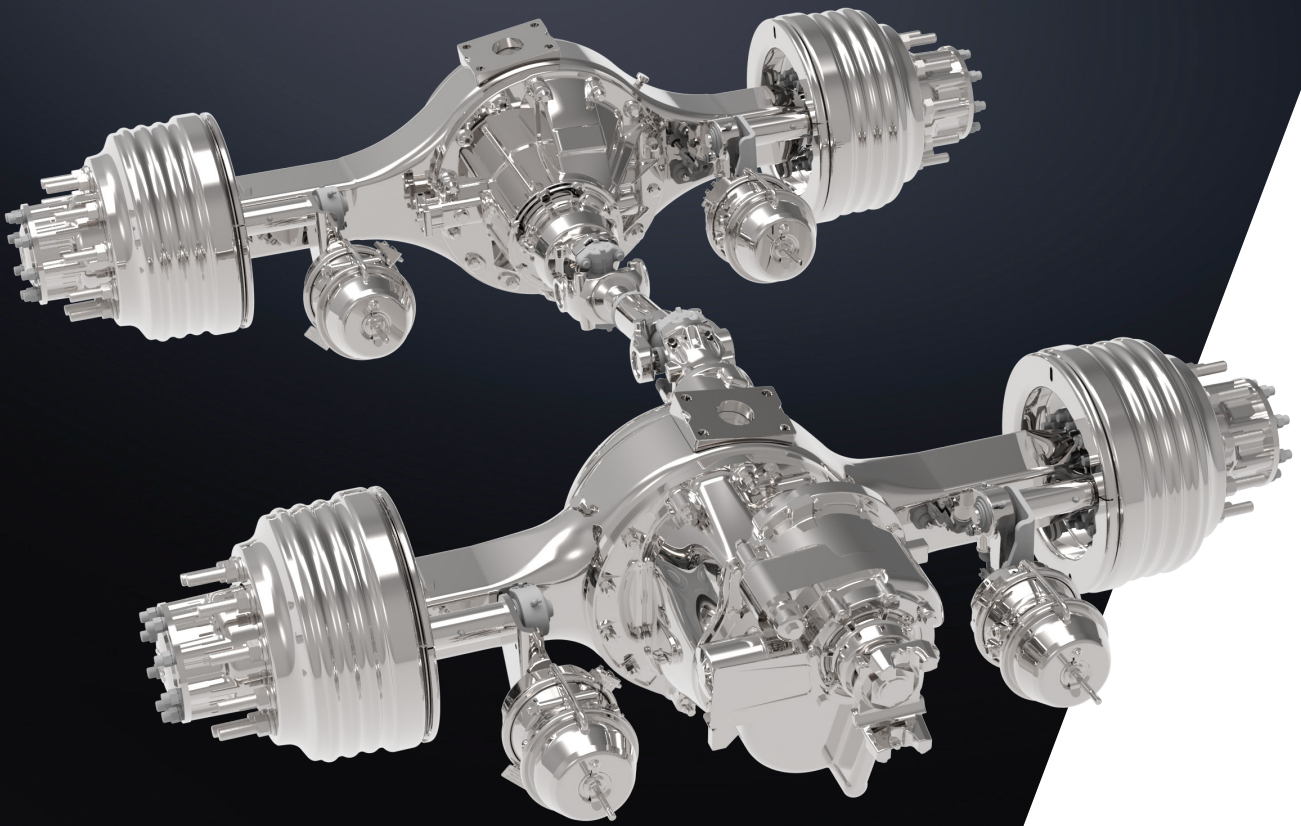


Meritor

**FOR
A WORLD
THAT'S
ALWAYS ON™**

HEAVY DUTY AND LONGER LIFE.

The RT52-185/RT52-380 range of tandem axles is the ideal choice for extra heavy duty applications and is proven in Australia over many years of use.

RT52-185/RT52-380 FEATURES

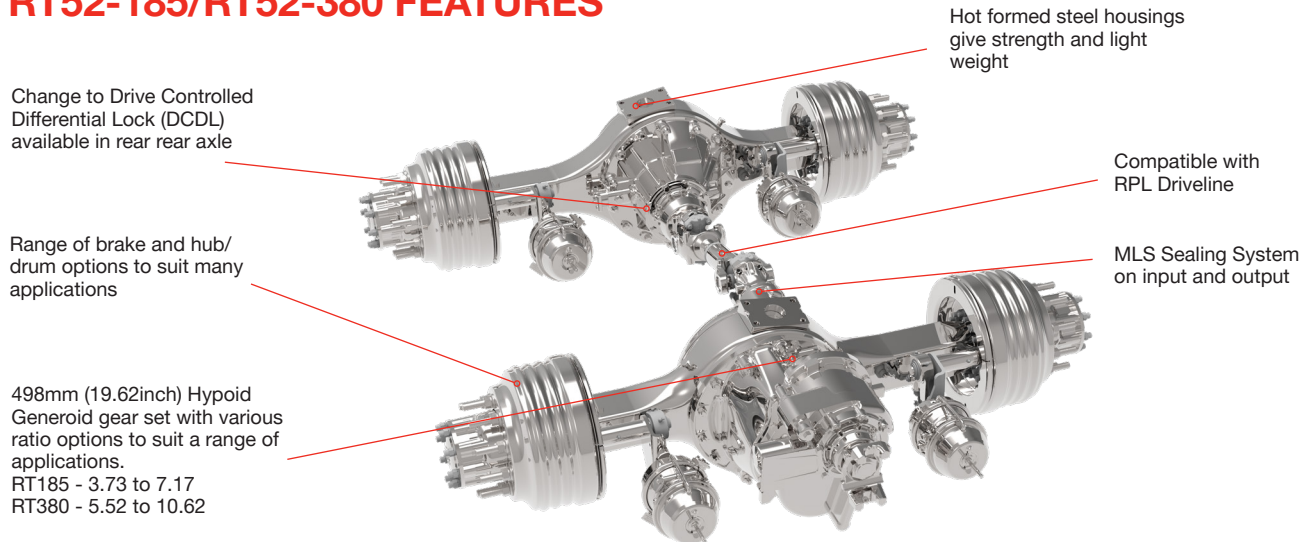

PERFORMANCE ADVANTAGES

- Advanced 498mm diameter Hypoid-Generoid™ gearing is designed for heavy duty performance in arduous conditions.
- The RT52-185/RT52-380 range features a secondary reduction in the 380 series allowing even greater capability.
- Driver controlled differential lock (DCDL) is available as an optional fitment in the rear axle of the 185 Series, this lets the driver select engagement to generate equal drive at each wheel, as needed.
- The latest generation MLS sealing systems compliment the product robustness to ensure you maintain on the road “uptime”.

SPECIFICATIONS

Axle Model	GAWR (lbs)	GCM Tonne (Nominal)*	Housing Thickness (mm)	Weight (kg)**
RT 52-185GP	52,000	140	14.2	905
RT 52-380GP	52,000	155	14.2	1002

Please note:

- *Permitted use of axles and components including capacity ratings where stated vary with application and service. Applications should be approved by Meritor. Approved ratings may be higher or lower than that indicated above, dependent upon engineering review. Refer to your OEM for Specific Axle Application Guidelines.
- **Indicative axle weight does not include yokes, brakes, hubs, bracket(s) or oils.



Meritor Heavy Vehicle Systems Australia
70 Berkshire Road
Sunshine, VIC 3020
AUSTRALIA

(03) 9311 6555

meritorpartsonline.com

CMCVSFL008 - RT52-185/RT52-380 06/23
Produced in AUS 06/23
©2023 Cummins Inc.